



# INSTRUCTIONS

1

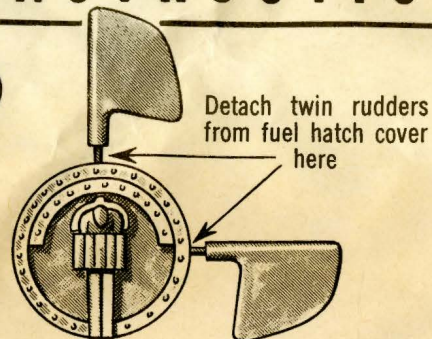

Detach twin rudders from fuel hatch cover here

3

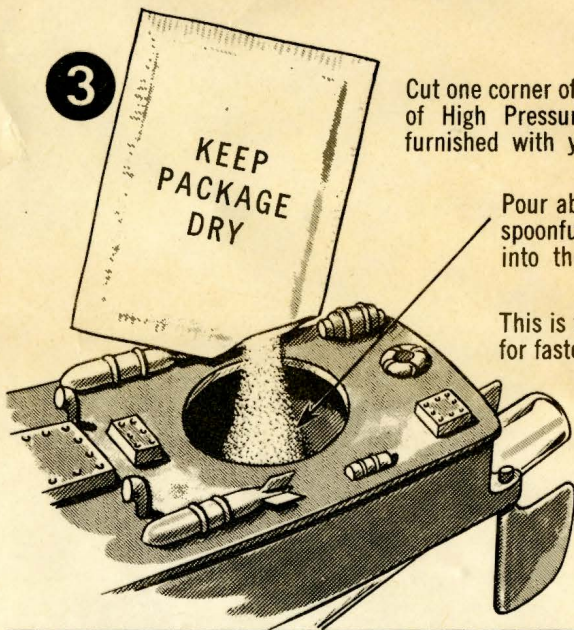


KEEP PACKAGE DRY

Cut one corner off the package of High Pressure Propellant furnished with your PT boat

Pour about one tea-spoonful of powder into the fuel hatch

This is the best amount for fastest action.

4

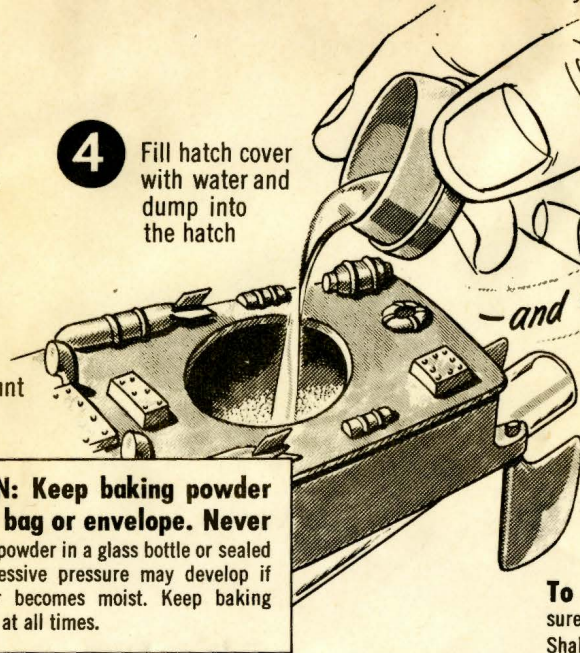


Fill hatch cover with water and dump into the hatch

**CAUTION: Keep baking powder in paper bag or envelope. Never put baking powder in a glass bottle or sealed vessel. Excessive pressure may develop if the powder becomes moist. Keep baking powder dry at all times.**

2

Insert rudders in holes here

Let end of jet raceway rest in groove provided

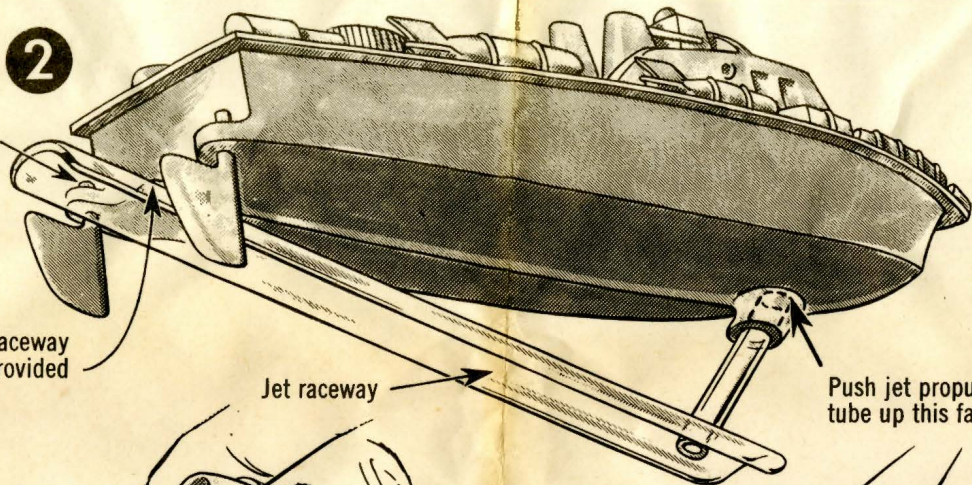


Jet raceway

Push jet propulsion tube up this far

5

Close hatch, pushing cover all the way in

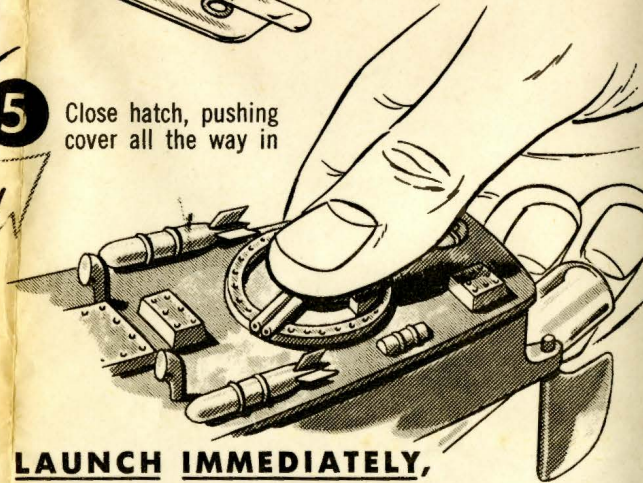

**LAUNCH IMMEDIATELY,** placing it level in the water

**To reload,** remove hatch cover and jet propulsion tube, rinsing both with water. Be sure the tube is clean. If not so, use a toothpick to clean it and rinse out again with water. Shake all excess water out of the boat before reloading.

**PARENTS:** The "High Pressure Propellant" furnished with this kit consists of ordinary baking powder. When the supply is exhausted, use any brand of baking powder.

**(NOT THE SAME AS BAKING SODA)**